
EKJ-IA/IA5

PRESSURE BOOSTER





602IA/IA5 / 802IA/IA5

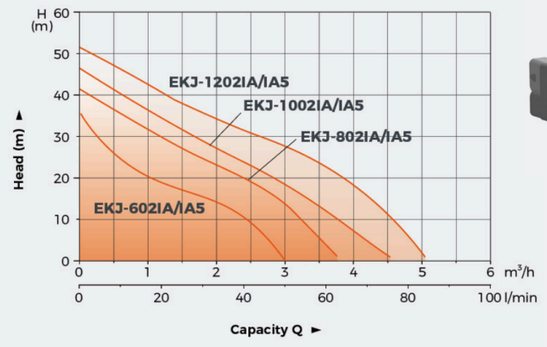

Optional five-way valve



1002IA/IA5 / 1202IA/IA5


Features

Self - priming garden pump, also suitable for the pressurisation of water in domestic applications
Compact, light, robust and easy to use
Motor with thermal protector
The pressure tank configuration will bring a better user experience
Equipped with cast iron pump body

Model	EKJ-602IA/IA5	EKJ-802IA/IA5	EKJ-1002IA/IA5	EKJ-1202IA/IA5
Rated Power	600 W	800 W	1000 W	1200 W
Max. Head	35 m	40 m	45 m	50 m
Max. Flow	3.0 m^3/h	3.7 m^3/h	4.5 m^3/h	5.0 m^3/h
Max. Suction Depth	7 m	7 m	8 m	8 m
Start Pressure	1.4 bar	1.4 bar	1.4 bar	1.4 bar
Stop Pressure	2.4 bar	2.8 bar	2.8 bar	2.8 bar
Tank	19 L	19 L	19 L	19 L
Outlet/Inlet	1"×1"	1"×1"	1"×1"	1"×1"
Power Cable Type	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m
Protection Class	IPX4	IPX4	IPX4	IPX4
Max. Delivery Temperature	35 °C	35 °C	35 °C	35 °C
Package Dimension	470x300x500 mm	470x300x500 mm	470x300x540 mm	470x300x540 mm
Package Gross Weight	14.2 kg	15.1 kg	17.6 kg	18.6 kg
Qty/20'GP	340	340	364	364

LKJ-P/PE/PE-1

DOMESTIC WATER SYSTEM

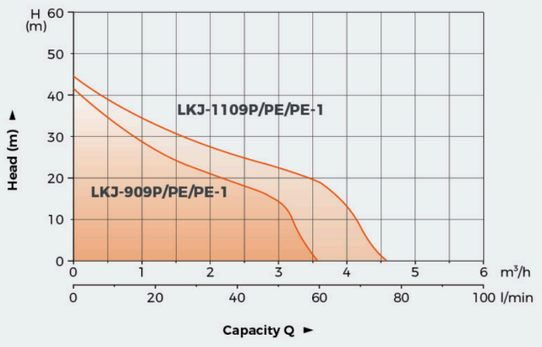



LKJ-X09PE



LKJ-X09P



LKJ-X09PE-1

Features

Smart: runs automatically when water is needed and then turn it off.
low-maintenance with integrated dry-run protection
Compact, Light, robust and easy to use.
Motor with thermal protector.

Application

For the supply of water in domestic applications.(gardening and pressurisation)

Model	LKJ-909P	LKJ-1109P	LKJ-909PE	LKJ-1109PE	LKJ-909PE-1	LKJ-1109PE-1
Rated Power	900 W	1100 W	900 W	1100 W	900 W	1100 W
Max. Head	42 m	46 m	42 m	46 m	42 m	46 m
Max. Flow	3.6 m^3/h	4.6 m^3/h	3.6 m^3/h	4.6 m^3/h	3.6 m^3/h	4.6 m^3/h
Max. Suction Depth	8 m	8 m	8 m	8 m	8 m	8 m
Power Cable Type	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m
Protection Class	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4
Outlet/Inlet	1"×1"	1"×1"	1"×1"	1"×1"	1"×1"	1"×1"
Max. Delivery Temperature	35 °C	35 °C	35 °C	35 °C	35 °C	35 °C
Package Dimension	515×256×340 mm	515×256×340 mm	515×256×340 mm	515×256×340 mm	515×256×340 mm	515×256×340 mm
Package Gross Weight	11.7 kg	11.8 kg	11.8 kg	12 kg	12.1 kg	12.1 kg
Qty/20'GP	528	528	528	528	528	528