



ALLSAI FP

FP1290 (12V9Ah)


ALLSAI FP | FP1290 (12V9AH)

SPECIFICATIONS


Nominal Voltage		12 V
Capacity (25°C)	20HR(10.5V)	9Ah
	10HR(10.5V)	8.4Ah
	1HR(9.60V)	5.8Ah
Dimension	Length	151± 1.5mm (5.94inch)
	Width	65± 1mm (2.56inch)
	Height	94± 1mm (3.70inch)
	Total Height	100± 1mm (3.94inch)
Approx. Weight		2.60kg (5.73lbs) ± 5%
Terminal type		T1/T2/T25
Internal resistance (Fully charged, 25 °C)		Approx. 19m Ω
Capacity affected by temperature (20HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 month	Remaining Capacity: 91%
	6 month	Remaining Capacity: 82%
	12 month	Remaining Capacity: 65%
Nominal operating temperature		25°C±3°C (77°F± 5°F)
Operating temperature range	Discharge	-15°C~ 50°C (5°F~ 122°F)
	Charge	-10°C~ 50°C (14°F~ 122°F)
	Storage	-20°C~ 50°C (-4°F~ 122°F)
Float charging voltage(25 °C)		13.60 to 13.80V Temperature compensation: -18mV/ °C
Cyclic charging voltage(25°C)		14.50 to 14.90V Temperature compensation: -30mV/ °C
Maximum charging current		2.7A
Terminal material		Copper
Maximum discharge current		135A(5 sec.)
Designed floating life(20°C)		10years



Dimensions

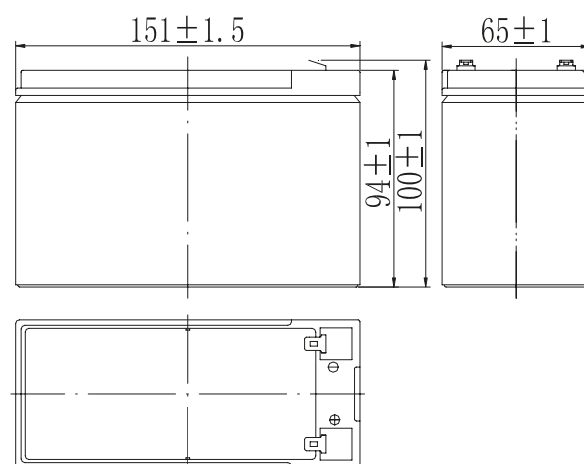

Terminal

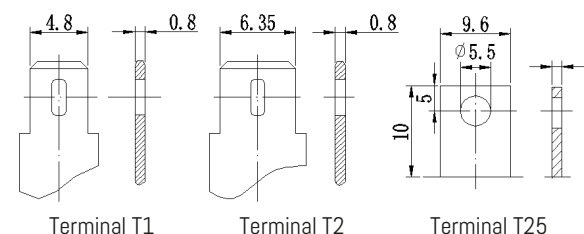

- Absorbent glass mat technology;
- Recognized by UL & CE;
- ABS container.

Constant Current Discharge Characteristics (A, 25 °C)


F.V/TIME	5min	10min	15min	30min	60min	2h	3h	4h	5h	10h	20h
9.60V	34.2	21.6	17.1	9.54	5.85	3.20	2.30	1.84	1.56	0.85	0.46
9.90V	33.2	21.0	16.7	9.35	5.76	3.18	2.28	1.83	1.55	0.85	0.45
10.2V	31.8	20.1	16.1	9.06	5.62	3.15	2.27	1.81	1.54	0.84	0.45
10.5V	30.4	19.2	15.5	8.84	5.50	3.10	2.25	1.80	1.53	0.84	0.45
10.8V	28.7	18.1	14.7	8.52	5.34	3.02	2.18	1.75	1.48	0.82	0.44

Constant Power Discharge Characteristics (Watt, 25 °C)


F.V/TIME	5min	10min	15min	30min	60min	2h	3h	4h	5h	10h	20h
9.60V	382	244	195	109	67.7	37.4	27.3	21.9	18.6	10.2	5.48
9.90V	370	236	190	107	66.7	37.2	27.1	21.7	18.5	10.2	5.46
10.2V	355	227	183	104	65.0	36.9	26.9	21.6	18.4	10.1	5.43
10.5V	340	217	177	101	63.7	36.3	26.7	21.4	18.3	10.0	5.40
10.8V	321	205	168	97.6	61.8	35.4	25.9	20.8	17.7	9.84	5.29

Note: The above characteristics data can be obtained within three charge/discharge cycles.


Discharge Characteristics(25 °C)

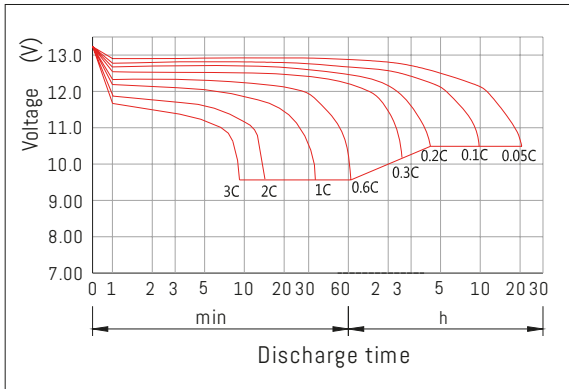


Discharge Characteristics(25 °C)

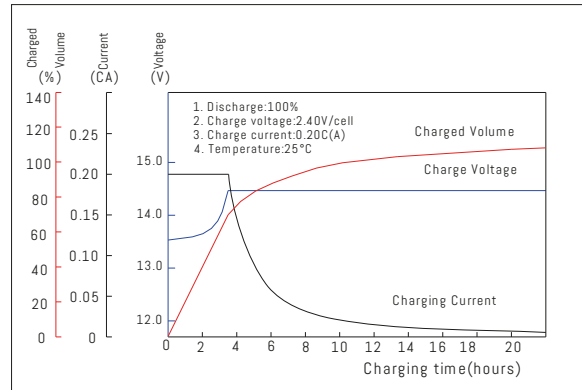


Effect of Temperature on Capacity

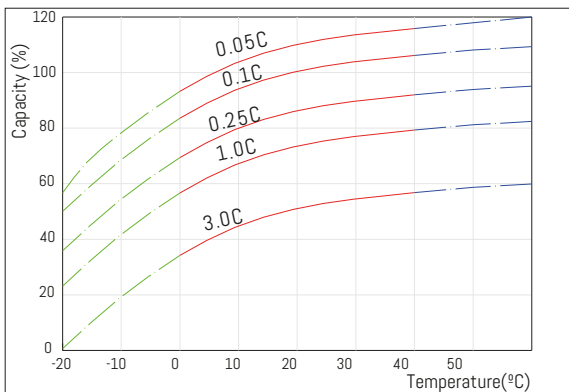


Self-discharge Characteristics

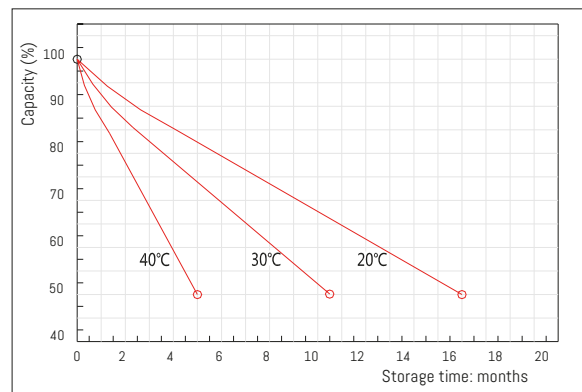


The Relationship for Open Circuit Voltage and Residual Capacity (25°C)

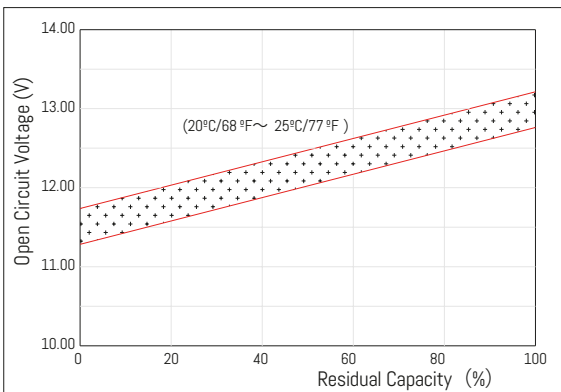


The Relationship for Charging Voltage and Temperature

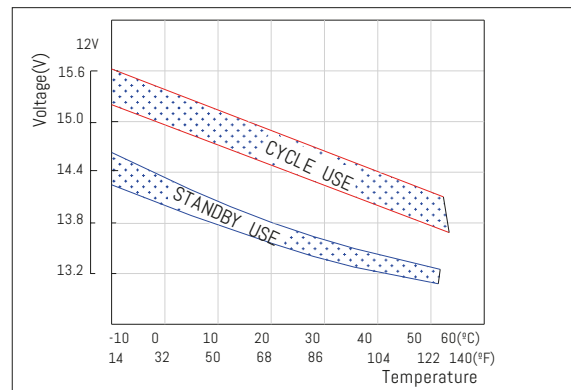

Floating Life on Temperature

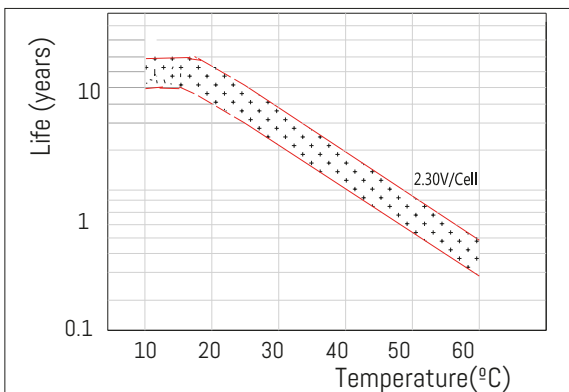

Cycle Life on D.O.D(25°C)

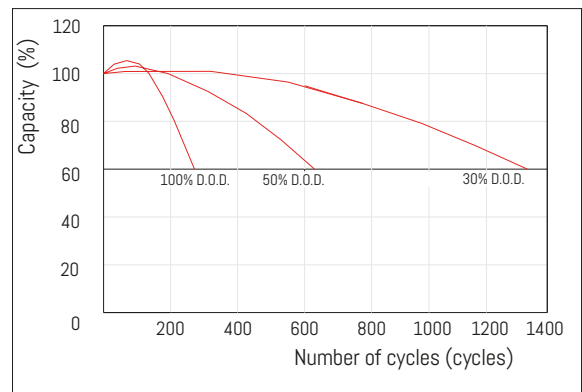



ALLSAI SD SERIES

www.allsai.com / comercial@allsai.com

ACERCA DE ALLSAI

ALLSAI es una compañía con más de 15 años de experiencia en el mercado latinoamericano destacándose por innovar continuamente en las diferentes soluciones de respaldo de energía.

Actualmente contamos con un amplio portafolio de soluciones que agrega valor al negocio de nuestros clientes, logrando posicionar nuestra marca en toda la región con un sello de calidad y respaldo que hace la diferencia.

